




VALUE YOU CAN TRUST

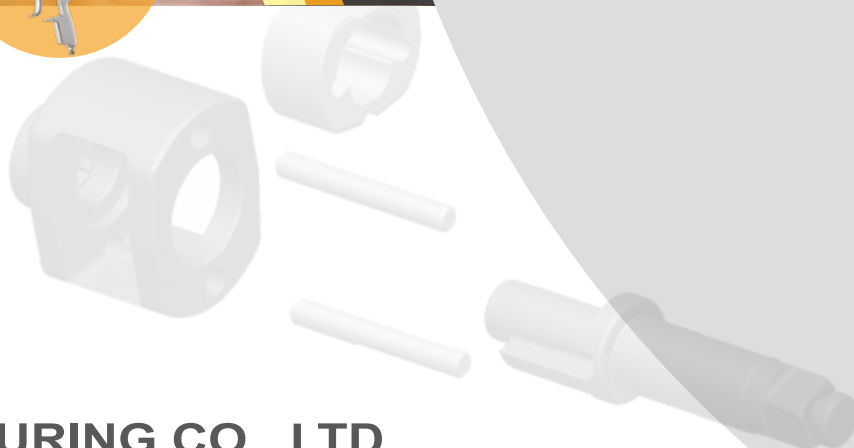

TNT MANUFACTURING CO., LTD.

NO. 483 SEC.1, SANRONG ROAD, WURI TOWNSHIP, TAICHUNG 414, TAIWAN

TEL: 886-4- 23363668 FAX: 886-4-23103706

EMAIL: christine@emaxpowers.com

www.emaxtaiwan.com

www.emaxtools.com

COMPOSITE IMPACT WRENCH - MAGNESIUM ALLOY

LIGHTWEIGHT POWERFUL -TWIN HAMMER

IMPACT MECHANISM

Twin hammer Anvil-
Japan SNCM 616



SPECIAL HARDENING TREATMENT CYLINDER

Cast iron cylinder
Cylinder Material FCD45
Heat treatment HRC47~52

AT-5141

1/2"DR IMPACT WRENCH

MAX TORQUE :
800 FT-LB (1080 NM)



AT-1046

3/4"DR IMPACT WRENCH

MAX TORQUE :
1250 FT-LB (1687 NM)



AT-6182P

1"DR PISTOL IMPACT WRENCH

MAX TORQUE :
2000 FT-LB (2700 NM)



AT-6182P-6

1"DR PISTOL IMPACT WRENCH WITH 6" ANVIL

MAX TORQUE :
2000 FT-LB (2700 NM)

Model No.	SQUARE DRIVE	FREE SPEED	MAX TORQUE		OVERALL LENGTH		BOLT CAPACITY	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	FT-LB	NM	IN.	MM				CFM	L/MIN	LBS.	KG
AT-5141	1/2"	8500	800	1080	7	179	M19	1/4"	3/8"	5.6	158	3.63	1.65
AT-1035B	3/4"	8500	750	1012	7.8	198	M21	1/4"	3/8"	5.6	158	4.07	1.85
AT-1046	3/4"	6000	1250	1687	8.2	209	M30	3/8"	3/8"	7	198	6.71	3.05
AT-1047	1"	6000	1250	1687	8.2	209	M32	3/8"	3/8"	7	198	6.71	3.05
AT-6182	1"	5500	2000	2700	10.1	256	M40	1/2"	1/2"	7.5	262	12.98	5.9
AT-6182-6	1"	5500	2000	2700	16.4	417	M40	1/2"	1/2"	7.5	262	14.96	6.8

COMPOSITE IMPACT WRENCH - ONE HAND F/R SWITCH

JAMBO / TWIN HAMMER



AT-5144

1/2"DR MINI IMPACT WRENCH

MAX TORQUE :
475 FT-LB (645 NM)



AT-5146

1/2"DR IMPACT WRENCH

MAX TORQUE :
760 FT-LB (1030 NM)

One Handed
Operation

Model No.	SQUARE DRIVE	FREE SPEED	MAX TORQUE		OVERALL LENGTH		BOLT CAPACITY	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	FT-LB	NM	IN.	MM				CFM	L/MIN	LBS.	KG
AT-5133	3/8"	10500	430	585	5.9	150	M22	1/4"	3/8"	4.5	127	2.87	1.3
AT-5144	1/2"	9500	475	645	4.4	112	M22	1/4"	3/8"	4.7	133	2.53	1.15
AT-5146	1/2"	7300	760	1030	6.9	175	M27	1/4"	3/8"	5	142	4.37	1.98
AT-5161	3/4"	5300	1330	1800	7.9	200	M30	3/8"	3/8"	7.8	221	7.5	3.4

COMPOSITE IMPACT WRENCH - PUSH BUTTON F/R

TWIN HAMMER



AT-5146TB

1/2"DR IMPACT WRENCH

MAX TORQUE :
830 FT-LB (1130 NM)



Model No.	SQUARE DRIVE	FREE SPEED	MAX TORQUE		OVERALL LENGTH		BOLT CAPACITY	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	FT-LB	NM	IN.	MM				CFM	L/MIN	LBS.	KG
AT-5144JB	1/2"	9500	500	678	4.6	116	M22	1/4"	3/8"	4.8	136	2.6	1.2
AT-5144TB	1/2"	9000	480	651	4.7	120	M22	1/4"	3/8"	4.8	136	2.6	1.2
AT-5146TB	1/2"	7500	830	1130	7.1	180	M27	1/4"	3/8"	4.8	136	4.4	2

SOCKET ADAPTER



Model No.	FEMALE SQUARE DRIVE	MALE SCREW SIZE	PACKING
SA-6001	1/2"	5/8" -11 UNC	100PCS/7KG/9KG/1'
SA-6002	1/2"	3/8" -24 UNF	100PCS/7KG/9KG/1'
SA-6003	1/2"	M14 -2.0	100PCS/7KG/9KG/1'
SA-6004	1/2"	M10-1.5	100PCS/7KG/9KG/1'
SA-6005	5/8" - 11UNC	1/4" - 20UNC	100PCS/7KG/9KG/1'
SA-6006	M14 -2.0	1/4" - 20 UNC	100PCS/7KG/9KG/1'
SA-6007	M10-1.5	1/4" - 20 UNC	100PCS/7KG/9KG/1'



LIGHT DUTY - CHISEL SCALER



AT-2129F



AT-2129FK

CHISEL SCALER X 1PC
AIR NIPPLE (1/4") X 1PC
CHISEL X 3PCS

Model No.	BLOW PER MINUTE	PISTON DIAMETER	PISTON STROKE	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT		OVERALL LENGTH
	BPM					CFM	L/MIN	LBS.	KG	
AT-2129F	10000	10 X 29.8 MM	16MM	1/4"	3/8"	3	84	0.66	0.3	222

CHISEL FOR AIR HAMMER



AT-2050R

9PCS CHISEL SET

SHANK: Ø10.18mm ROUND

JAW OPEN CHISEL : 17MM

FLAT CHISEL

POINT CHISEL

3/8" DRIVE CHISEL

1/2" DRIVE CHISEL

CURVE CHISEL 25MM

FLAT CHISEL 25MM

HALF MOON CHISEL 40 X 68MM

HEAVY DUTY RATCHET WRENCH - LOW NOISE TYPE

ERGONOMIC DESIGN



AT-2403B
3/8"DR RATCHET
HEAD-SEALED DESIGN



AT-3027B
3/8"DR RATCHET
SINGLE PAWL



AT-2402B
1/2"DR RATCHET
TWIN PAWL



SEALED TYPE
PREVENT
HEAD OPEN

Model No.	SQUARE DRIVE	FREE SPEED	MAX TORQUE		OVERALL LENGTH		BOLT CAPACITY	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	FT-LB	NM	IN.	MM				CFM	L/MIN	LBS.	KG
AT-2403B	3/8"	300	40	54	5.3	135	M10	1/4"	3/8"	3.7	104	1.1	0.5
AT-3027B	3/8"	300	30	41	7.0	180	M9	1/4"	3/8"	2.6	74	1.58	0.72
AT-2402B	1/2"	180	75	101	9.4	240	M10	1/4"	3/8"	3.9	110	2.70	1.2


PALM SANDER



AT-7582A
PALM SANDER
DISC : 2" OR 3"
ORBIT DIA : 3MM



AT-7249A
3 IN 1 ANGLE SANDER
ANGLE SANDER/CUT-OFF/GRINDER
w/o Cutting wheel & Grinding wheel

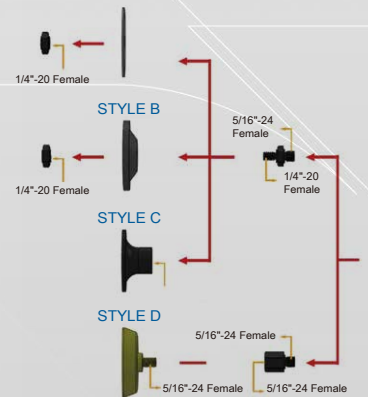

Model No.	DISC SIZE	FREE SPEED	ORBIT DIA	SPINDLE	OVERALL LENGTH		AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	MM		IN.	MM			CFM	L/MIN	LBS.	KG
AT-7582A	2" OR 3"	16000	3	5/16"- 24 UNF	4.8	123	1/4"	3/8"	3	84	1.83	0.83
AT-7582P	2" OR 3"	2600	-	5/16"- 24 UNF	4.8	121	1/4"	3/8"	3	84	1.74	0.79
AT-7249A	2"	20000	-	1/4"- 20 UNC	4.8	124	1/4"	3/8"	3	84	1.85	0.84

INDUSTRIAL MINI TOOLS



ANGLE DIE GRINDER

AT-5216AL-10 9,000RPM
AT-5216AL-30 30,000RPM



ANGLE POLISHER

AT-5216AL-DS2 9,000RPM



ANGLE CUTTER

AT-5216AL-T3 9,000RPM



ANGLE SANDER

AT-5216AL-OS1 1"PAD
AT-5216AL-OS14 1.5"PAD
AT-5216AL-OS2 2"PAD

Model No.	FREE SPEED	ORBIT DIA. (MM)	OVERALL	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
	RPM		L X H (MM)			CFM	L/MIN	LBS.	KG
AT-5216AL-10	9000	-	120 x 83	1/4"	3/8"	2.3	65	0.88	0.4
AT-5216AL-30	30000	-	120 x 83	1/4"	3/8"	2.3	65	0.88	0.4
AT-5216AL-DS2	9000	-	120 x 66	1/4"	3/8"	2.3	65	0.92	0.42
AT-5216AL-T3	9000	-	120 x 94	1/4"	3/8"	2.3	65	1.14	0.52
AT-5216AL-OS1	9000	2.5	120 x 97	1/4"	3/8"	2.3	65	1.06	0.48
AT-5216AL-OS14	9000	2.5	120 x 97	1/4"	3/8"	2.3	65	1.06	0.48
AT-5216AL-OS2	9000	2.5	120 x 97	1/4"	3/8"	2.3	65	1.06	0.48

INDUSTRIAL MINI TOOLS



MINI BELT SANDER

AT-5216-BS1033A BELT SIZE:10X330mm

AT-5216-BS1333A BELT SIZE:13X330mm

AT-5216-BS1345A BELT SIZE:13X457mm




ANGLE SANDER

AT-5216AL-OS3 3"PAD

FREE SPEED : 9000RPM

Model No.	FREE SPEED	ORBIT DIA. (MM)	OVERALL L X H (MM)	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
	RPM					CFM	L/MIN	LBS.	KG
AT-5216-BS1033A	9000	-	247	1/4"	3/8"	2.3	65	1.32	0.6
AT-5216-BS1333A	9000	-	247	1/4"	3/8"	2.3	65	1.32	0.6
AT-5216-BS1345A	9000	-	310	1/4"	3/8"	2.3	65	1.32	0.6
AT-5216AL-OS3	9000	3	120 x 74	1/4"	3/8"	2.3	65	1.10	0.5

CHAMFER TOOL

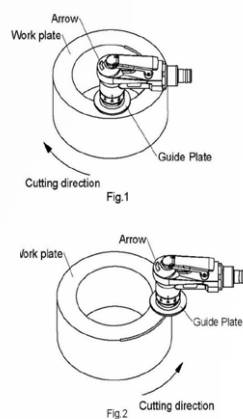

AT-5216AL WITHOUT HOSE

AT-5216 WITH HOSE

Model No.	FREE SPEED	OVERALL L X H (MM)	AIR INLET	AIR HOSE	AVG. AIR CONSUMPTION		NET WEIGHT	
	RPM				CFM	L/MIN	LBS.	KG
AT-5216AL	30000	120 x 65	1/4"	3/8"	2.3	65.09	1.07	0.48
AT-5216	28000	120 x 65 + 148	1/4"	3/8"	2.3	65.09	1.1	0.5

DRILL



AT-4030E

3/8"DR DRILL
RUBBER HANDLE
FREE SPEED: 2,200 RPM

AT-3038

3/8"DR REVERSIBLE DRILL
FREE SPEED: 1,800 RPM



F/R



AT-3038K

3/8"DR REVERSIBLE DRILL
RUBBER HANDLE
W/ KEYLESS CHUCK
FREE SPEED: 1,800 RPM



AT-3038KB

3/8"DR REVERSIBLE DRILL
13MM KEYLESS CHUCK
FREE SPEED: 1,800 RPM



AT-4500

1/2"DR REVERSIBLE DRILL
RUBBER HANDLE
FREE SPEED: 500 RPM



AT-4040E

1/2"DR DRILL

AT-4012

1/2"DR REVERSIBLE DRILL
RUBBER HANDLE
FREE SPEED: 800 RPM



AT-4012RK

1/2"DR REVERSIBLE
KEYLESS DRILL
RUBBER HANDLE
FREE SPEED: 800 RPM

Model No.	SQUARE DRIVE	FREE SPEED	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	RPM	IN.			CFM	L/MIN	LBS.	KG
AT-4030E	3/8"	2,200	7 2/7"	185	1/4"	3/8"	4.0	113	2.4	1.1
AT-3038	3/8"	1,800	7 2/7"	185	1/4"	3/8"	4.0	113	2.4	1.1
AT-3038K	3/8"	1,800	7 2/7"	185	1/4"	3/8"	4.0	113	2.4	1.1
AT-3038KB	3/8"	1,800	7 2/7"	185	1/4"	3/8"	4.0	113	2.4	1.1
AT-4500	1/2"	500	9"	230	1/4"	3/8"	4.0	113	2.9	1.3
AT-4040E	1/2"	800	8 1/4"	210	1/4"	3/8"	4.0	113	2.4	1.1
AT-4012	1/2"	800	8 1/4"	210	1/4"	3/8"	4.0	113	2.4	1.1
AT-4012RK	1/2"	800	8 1/4"	210	1/4"	3/8"	4.0	113	2.4	1.1

METAL SHEAR



AT-6022

PISTOL METAL SHEAR
FREE SPEED: 2,200 RPM

SCREWDRIVER



AT-4008

ADJUSTABLE CLUTCH SCREWDRIVER
FREE SPEED: 800 RPM

AT-4018

ADJUSTABLE CLUTCH SCREWDRIVER
FREE SPEED: 1,800 RPM

Model No.	FREE SPEED (RPM)	WIDE OF CUT	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
		MM	IN.	MM			CFM	L/MIN	LBS.	KG
AT-6022	2,200	5.5	9"	215	1/4"	3/8"	6	170	2.2	1

Model No.	HEX SHANK SIZE	FREE SPEED	TORQUE		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	IN-LBS	N-M			CFM	L/MIN	LBS.	KG
AT-4008	1/4" (6.35MM)	800	45-145	5-16.4	1/4"	3/8"	4	113	2.6	1.2
AT-4018	1/4" (6.35MM)	1800	20-115	2.3-13	1/4"	3/8"	4	113	2.6	1.2

DIE GRINDER



AT-7033D(M)

1/4" (6MM) DIE GRINDER
FREE SPEED: 22,000 RPM



AT-7033E(M)

**1/4" (6MM) DIE GRINDER
LOW SPEED TYPE**
FREE SPEED: 4,000 RPM



AT-7033DL(M)

**1/4" (6MM) EXTENDED
DIE GRINDER**
FREE SPEED: 22,000 RPM



AT-7034D(M)

1/4" (6MM) ANGLE DIE GRINDER
FREE SPEED: 18,000 RPM



GS-10 1/4" (6MM)

10PCS GRINDER STONES SET



Model No.	FREE SPEED (RPM)	COLLET SIZE	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
			IN.	MM			CFM	L/MIN	LBS.	KG
AT-7033D(M)	22,000	1/4" (6MM)	6 3/4"	170	1/4"	3/8"	4	113	1.5	0.7
AT-7033E(M)	4,000	1/4" (6MM)	8 1/4"	210	1/4"	3/8"	4	113	2.2	1
AT-7033DL(M)	22,000	1/4" (6MM)	10 1/4"	260	1/4"	3/8"	4	113	1.5	0.7
AT-7034D(M)	18,000	1/4" (6MM)	6 3/4"	170	1/4"	3/8"	4	113	1.8	0.8

STRAIGHT TYPE AUTO REPAIR TOOLS



AT-3038S

3/8" STRAIGHT DRILL
RUBBER GRIP
FREE SPEED: 2,500 RPM



AT-6020A

AIR METAL SHEAR
FREE SPEED: 2,500 RPM



AT-6014D

KNIFE
FREE SPEED: 20,000 RPM



KF-003-1A



KF-003-1B



KF-003-3A



KF-003-2C



KF-003-2C

Model No.	SQUARE DRIVE	FREE SPEED	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
		RPM	IN.	MM			CFM	L/MIN	LBS.	KG
AT-3038S	3/8"	2,500	8 4/9"	215	1/4"	3/8"	4.0	113	2.2	1.1

Model No.	FREE SPEED (RPM)	WIDE OF CUT	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
		MM /IN.	IN.	MM			CFM	L/MIN	LBS.	KG
AT-6020A	2,500	5.5 (7/32")	9 6/7"	250	1/4"	3/8"	4	113	2.6	1.2
AT-6014D	20,000	3	7 5/7"	195	1/4"	3/8"	4	113	2.2	1

STRAIGHT TYPE AUTO REPAIR TOOLS



AT-6030MA

CUT OFF TOOL

FREE SPEED: 20,000 RPM



AT-6056E

H.D. TIRE BUFFER

FREE SPEED: 2,500 RPM



AT-6034E

SMART ERASER

FREE SPEED: 2,500 RPM



P6034-34



P6034-34D



P6034-40 SHAFT

Model No.	FREE SPEED (RPM)	COLLET SIZE	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
			IN.	MM			CFM	L/MIN	LBS.	KG
AT-6030MA	20,000	3" (76.2mm)	7	180	1/4"	3/8"	4	113	1.8	0.8

Model No.	FREE SPEED (RPM)	SANDING / CHUCK SIZE	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
			IN.	MM			CFM	L/MIN	LBS.	KG
AT-6034E	2,500	7/16" (11MM)	8 7/8"	225	1/4"	3/8"	4	113	2.2	1
AT-6056E	2,500	7/16" (11MM)	8 1/3"	210	1/4"	3/8"	4	113	2.2	1

RATCHET WRENCH



AT-3138

3/8"DR RATCHET WRENCH

MAX TORQUE: 50FT-LB (68NM)

AT-4138

1/2"DR RATCHET WRENCH

MAX TORQUE: 50FT-LB (68NM)

Model No.	SQUARE DRIVE	FREE SPEED RPM	MAX TORQUE		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		OVERALL LENGTH MM	NET WEIGHT	
			FT-LB	NM			CFM	L/MIN		LBS.	KG
AT-3138	3/8"	160	50	68	1/4"	3/8"	4	113	265	2.9	1.32
AT-4138	1/2"	160	50	68	1/4"	3/8"	4	113	265	2.9	1.32

BELT SANDER / CUT OFF TOOL



AT-7006B

BELT SANDER 6X330MM (#80 #100 #120)

AT-7009ABS

BELT SANDER 10X330MM (#80 #100 #120)

AT-7009C

BELT SANDER 10X457MM (#80 #100)

AT-7012B

BELT SANDER 12X610MM (#80 #100)



AT-7020B

BELT SANDER 20X520MM

(#80 #100)



AT-6028

3" CUT OFF TOOL

FREE SPEED: 15,000 RPM

Model No.	SANDING BELT		FREE SPEED RPM	OVERALL LENGTH		AIR INLET (PT)	AIR HOSE (ID)	AVG. AIR CONSUMPTION		NET WEIGHT	
	IN.	MM		IN.	MM			CFM	L/MIN	LBS.	KG
AT-7006B	1/4" X 13"	6 X 330	16,000	12 1/2"	320	1/4"	3/8"	4	113	2.1	0.95
AT-7009ABS	2/5" X 13"	10 X 330	16,000	12 1/2"	320	1/4"	3/8"	4	113	2.1	0.95
AT-7009C	2/5" X 18"	10 X 457	16,000	15 1/4"	385	1/4"	3/8"	4	113	2.1	1.1
AT-7012B	1/2" X 24"	12 X 610	16,000	17 15/16"	455	1/4"	3/8"	4	113	2.4	1.2
AT-7020B	7/8" X 20"	20 X 520	16,000	16 15/16"	430	1/4"	3/8"	4	113	3.1	1.4
Model No.	Cutting Wheel		RPM	OVERALL LENGTH		INLET	HOSE	CFM	L/MIN	LBS.	KG
AT-6028	3" / 76.2mm		15,000	13 4/5"	350	1/4"	3/8"	4	113	3	1.38



AT-5140K1

7PCS 1/2"DR.

COMPOSITE IMPACT WRENCH KIT

- 1PC AT-5140 1/2"DR. IMPACT WRENCH
- 1PC DEEP SOCKET 15MM CR-MO
- 1PC DEEP SOCKET 17MM CR-MO
- 1PC DEEP SOCKET 19MM CR-MO
- 1PC DEEP SOCKET 21MM CR-MO
- 1PC OIL POT
- 1PC CONNECTOR



AT-5140K2 (CR-MO) 16PCS 1/2"DR. COMPOSITE IMPACT WRENCH KIT

AT-5140K3 (CR-V)

1PC 1/2"DR. COMPOSITE IMPACT WRENCH

- SOCKETS: 9, 10, 11, 13, 14, 17, 19, 22, 24, 27MM
- 1PC 5" EXTENSION BAR
- 1PC OIL POT
- 1PC MINI OILER
- 1PC CONNECTOR
- 1PC BLOW MOULD CASE

AT-5140K5

17PCS 1/2"DR. IMPACT WRENCH (CR-MO)

- 1PC 1/2"DR. COMPOSITE IMPACT WRENCH
- SOCKETS: 9, 10, 11, 13, 14, 17, 19, 22, 24, 27MM
- 1PC 5" EXTENSION BAR
- 1PC OIL POT
- 1PC MINI OILER
- 1PC CONNECTOR
- 1PC 1/4" AIR INLET



AT-7033D(M)K

1/4" (6MM) DIE GRINDER KIT

- 1PC AT-7033D(M) DIE GRINDER
- 1PC SPANNERS
- 5PCS 1/4" SHANK GRINDING STONES
- 5PCS 1/8" SHANK GRINDING STONES
- 1PC 1/8" COLLET
- 1PC NIPPLE
- 1PC BLOW MOULD CASE
- NET WEIGHT:1.2KG



AT-7034D(M)K

1/4"(6MM)ANGLE DIE GRINDER KIT

- 1PC AT-7034D(M) DIE GRINDER
- 1PC SPANNERS
- 5PCS 1/4" SHANK GRINDING STONES
- 5PCS 1/8" SHANK GRINDING STONES
- 1PC 1/8" COLLET
- 1PC NIPPLE
- 1PC BLOW MOULD CASE
- NET WEIGHT:1.3KG



AT-6014AK

KNIFE KIT

- 1PC 5MM WRENCH KEY
- 1PC 57MM BLADE
- 1PC 30MM BLADE
- 1PC 35MM BLADE
- 1PC BLOW CASE



AT-6111K


BODY SAW KIT

- 5PCS 32T SAW BLADES
- 5PCS 24T SAW BLADES
- 2PCS HEX. WRENCH (3MM & 4MM)
- 1PC MINI OILER
- 1PC SWIVEL CONNECTOR
- 5PCS FILES
- 1PC BLOW MOULD CASE

PNEUMATIC HIGH FLOW OIL & LIQUID DISPENSER

MODEL NO. : AA-2111A

- AIR INLET: 1/4"
- AVG. AIR CONS: 2.5 CFM
- WORKING PRESSURE: 30-90 PSI

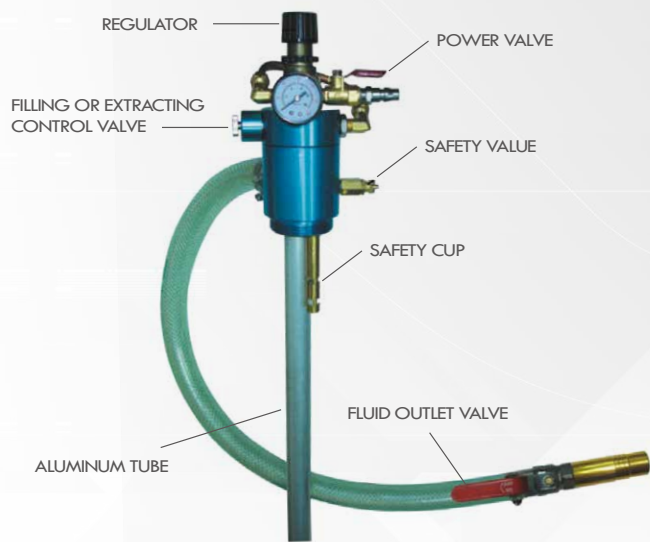


EXTRACTING
FILLING OIL & LIQUID
ONLY NEED 6 MINUTES!




PNEUMATIC PISTON OIL & LIQUID PUMP

MODEL NO. : AA-2111N

- AIR INLET: 1/4"
- AVG. AIR CONS: 2.5 CFM
- WORKING PRESSURE: 30-90 PSI
- 2m HOSE: 1/2" ID
- FLOW: 7~11 l/min

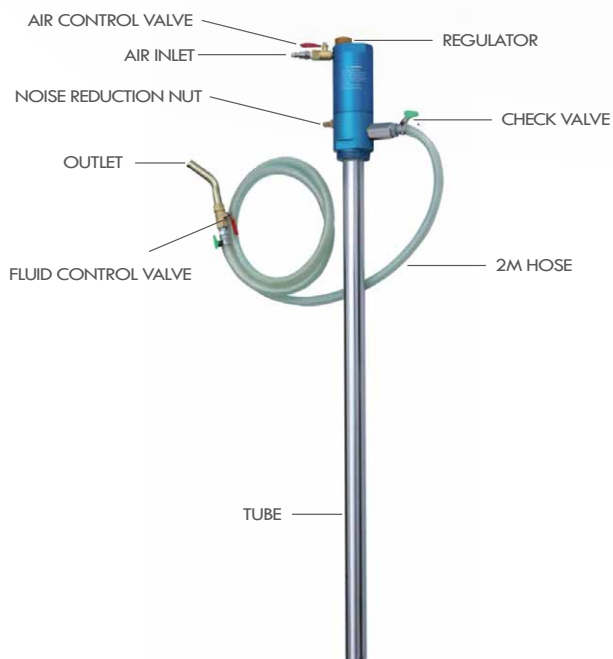

FILLING OIL & LIQUID
NEED 25 MINUTES!

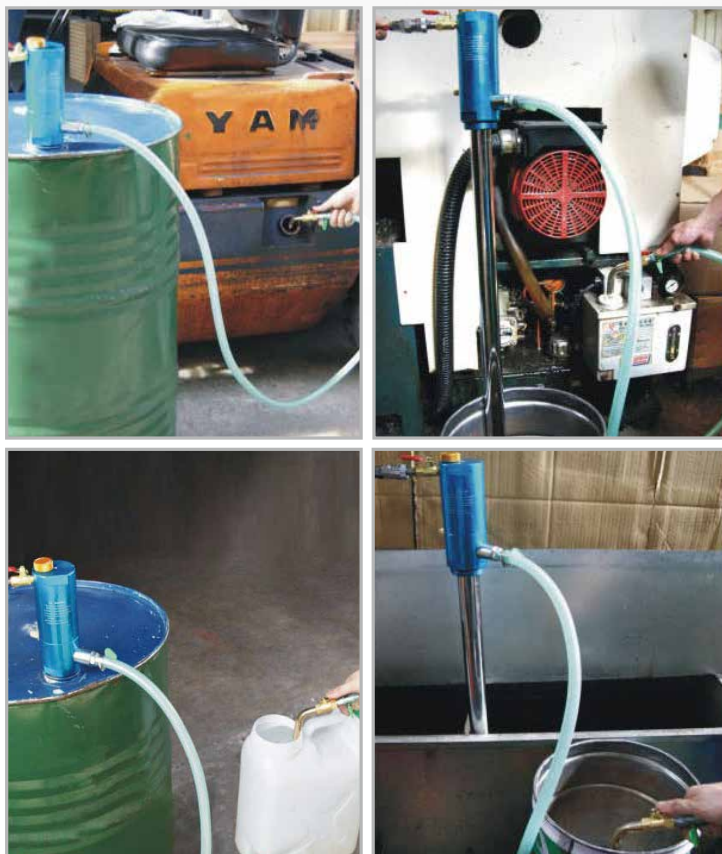

FOR 50 GAL./ INDUSTRY / DIESEL / WATER FLUID